




MS403

E4

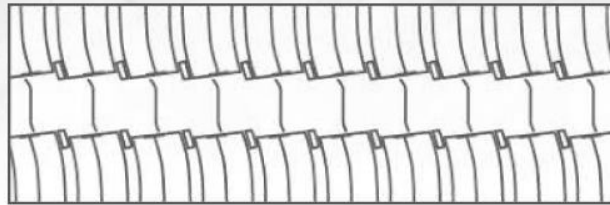

The Maxam MS403 incorporates a versatile tread design, which allows flexibility in applications ranging from smooth haul roads to rough and rocky terrain - while still providing maximum productivity.

- Excellent traction in all haul road conditions
- Deep tread grooves provide a cooler running temperature for extended TKPH
- E4+ deep tread design for prolonged tyre life
- Wide and square footprint distributes load to minimise haul road disturbance
- Reinforced bead, shoulder, and sidewall for increased cut resistance
- Multiple tread compound options target specific site requirements

SIZE	STAR RATING	TYPE	RIM	O.D.	S.W.	T.D	TREAD COMPOUND	TMPH/TKPH	INFL. P.	L.C.C (LBS/KG)	LOAD & SPEED
				In	In	32nds			psi	30mph	
				mm	mm	mm			Kpa	50kph	
33.00R51	**	TL	24.00/5.0	120.7	35.9	105	Standard	480/700	102	85500	235B
				3066	912	84	Ultra Cut Resistant	331/483			
							Cut Resistant	408/595	700	38750	
							Heat Resistant	550/802			